

4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

D

D

C


C

B

B

A

A

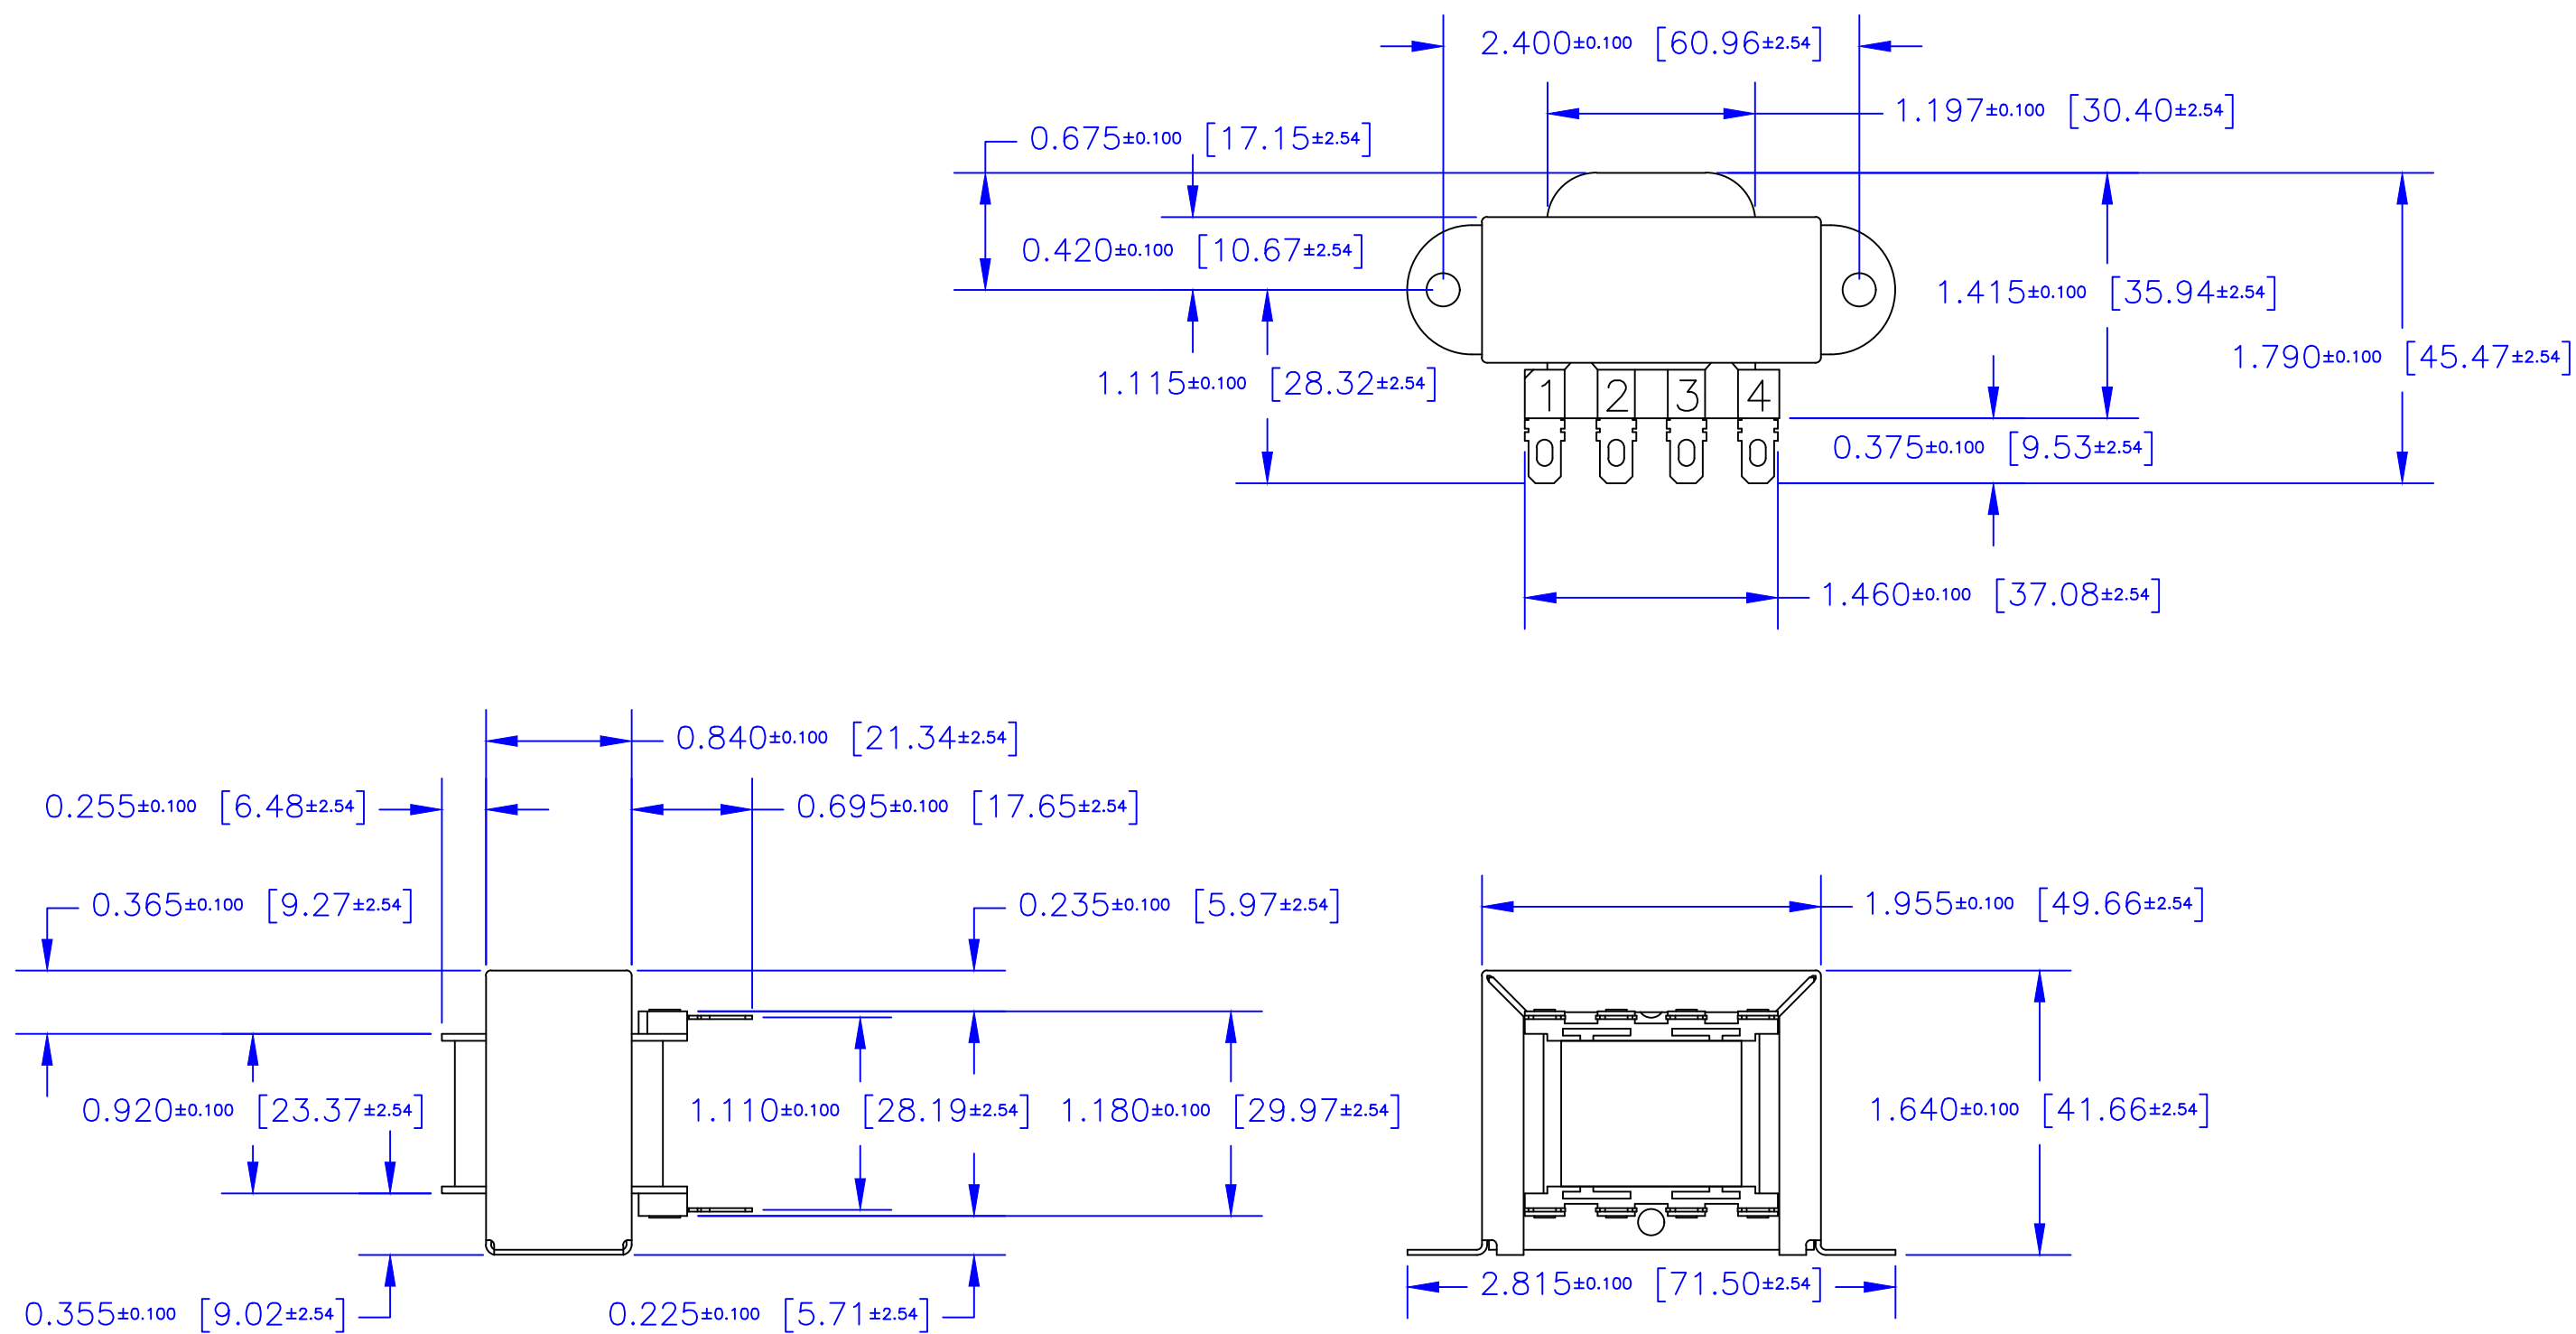

**\*\*NOTES: UNLESS OTHERWISE SPECIFIED!**

1. All material is UL listed.
2. All material are to be RoHS compliant.
3. Bobbin: Nylon 6/6 30% glass filled, Class B, Flammability 94HB UL E184262.
4. Magnet Wire: Class B, UL E32638, Gauge depending on the transformer design specifications requirement.
7. Finish Tape: Polyester film tape, Class 130°, dielectric strength 5000 volts, UL E17385, guide OANZ2.
8. Core Material: Depending on the transformer design specifications requirement.
6. Termination: 0.1875" quick disconnects.
7. Mounting: Zinc plated steel channel/frame.
8. Finish: Styrenated alkyd electrical varnish, air cured, UL E63933.

DIMENSIONS ARE IN INCHES [MILLIMETERS]. X.XXX = ±0.010 X.XX = ±0.03 ANGLES = ±0.05 UNLESS OTHERWISE SPECIFIED		<b>EDCOR Electronics</b> 7130 National Parks Highway, Carlsbad, NM 88220 Voice: (575) 887-6790 <a href="http://www.edcorusa.com">www.edcorusa.com</a>		
DRAWING BY <b>Brian Weston</b>		Date <b>1/2003</b>		
CHECKED BY <b>Brian Weston</b>		Date <b>1/2003</b>		
APPROVED BY <b>Larry Weston</b>		Date <b>1/2003</b>		
SIZE <b>C</b>		FSCM NO. <b>15000-EI625-075-18</b>		REV <b> </b>
SCALE: <b>1:1</b>		©2015 EDCOR Electronics		SHEET: <b>1 of 1</b>

4

3

2

1