





4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

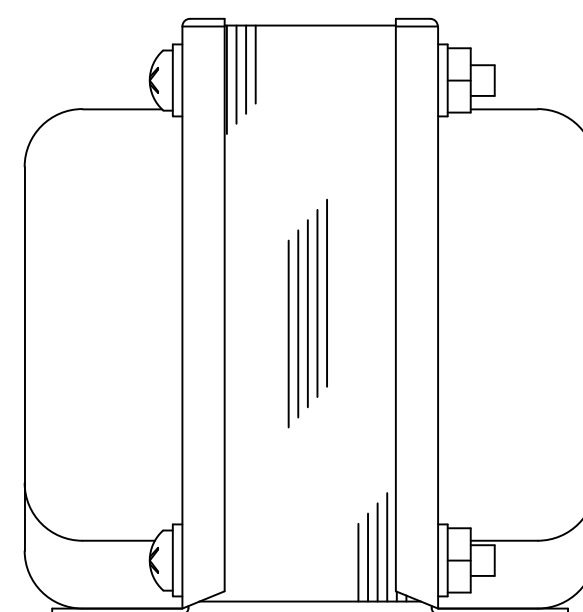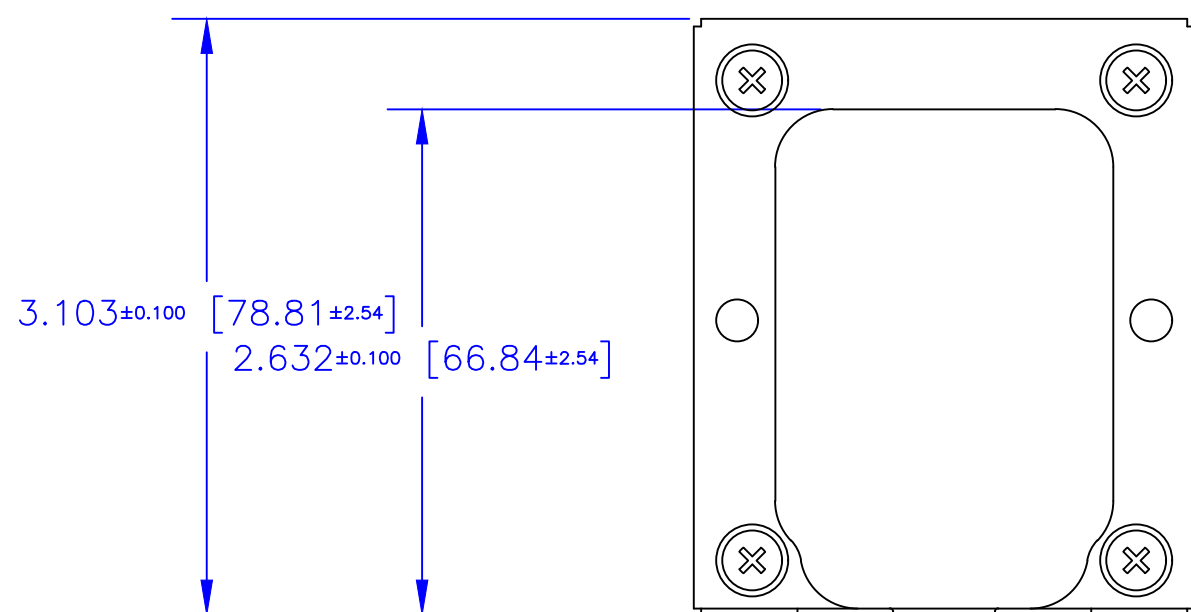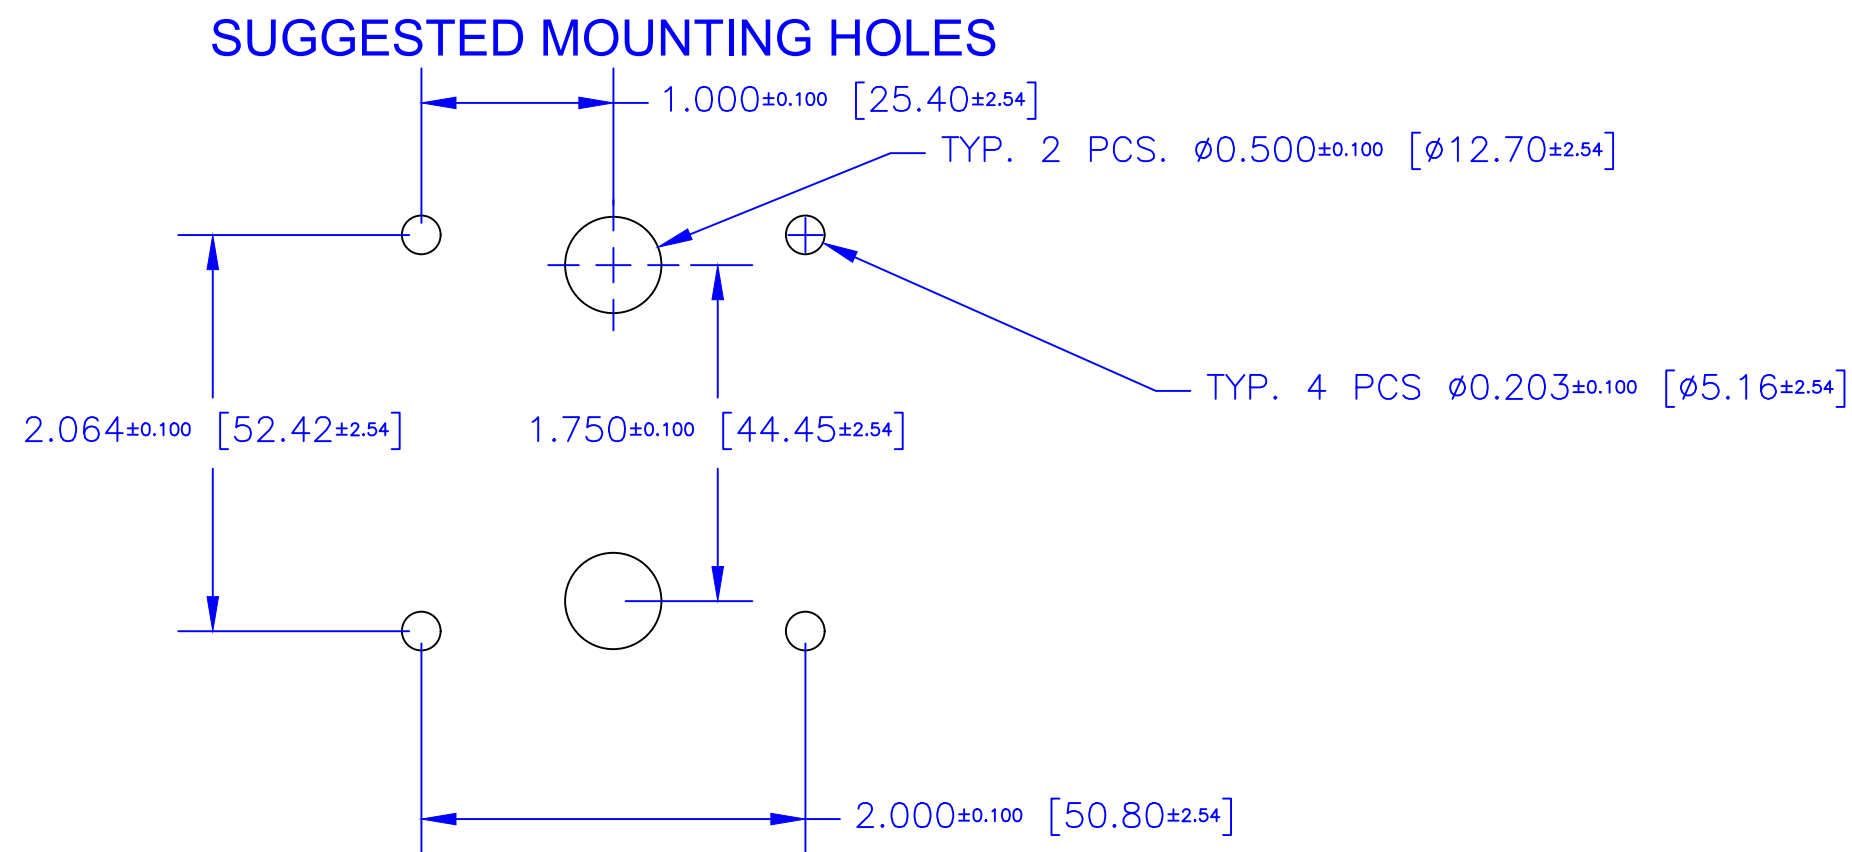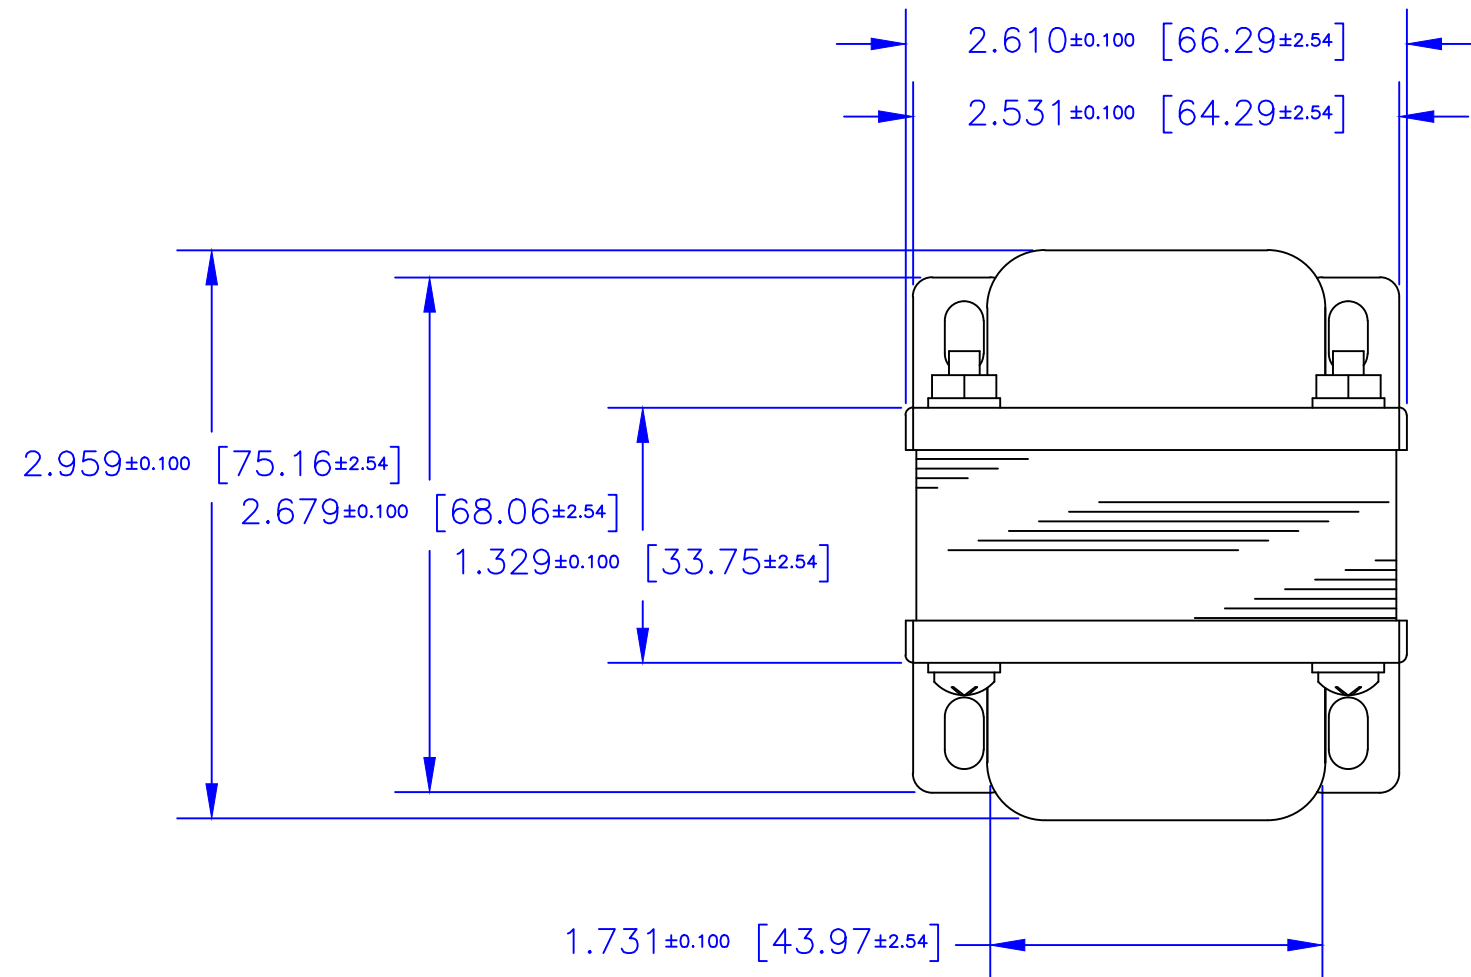

**\*\*NOTES: UNLESS OTHERWISE SPECIFIED!**

1. All material is UL listed.
2. All material are to be RoHS compliant.
3. Bobbin: Nylon 6/6 30% glass filled, Class B, Flammability 94HB UL E184262.
4. Magnet Wire: Class B, UL E32638, Gauge depending on the transformer design specifications requirement.
5. Finish Tape: Polyester film tape, Class 130°, dielectric strength 5000 volts, UL E17385, guide OANZ2.
6. Core Material: Depending on the transformer design specifications requirement.
7. Termination: Depending on the transformer design specifications requirement.
8. Mounting: Powder coated steel vertical end bells.
9. Finish: Styrenated alkyd electrical varnish, air cured, UL E63933.

DRAWING BY <b>Brian Weston</b>		Date <b>4/2008</b>	<b>EDCOR Electronics</b> 7130 National Parks Highway, Carlsbad, NM 88220 Voice: (575) 887-6790 www.edcorusa.com	
CHECKED BY <b>Brian Weston</b>		Date <b>4/2008</b>	E100 x 1¼" vertical end bell mounted	
APPROVED BY <b>Larry Weston</b>		Date <b>4/2008</b>	SIZE <b>C</b>	FSCM NO. <b>15000-EI100-125-0X</b>
UNLESS OTHERWISE SPECIFIED		SCALE: <b>1:1</b>	©2015 EDCOR Electronics	SHEET: <b>1 of 1</b>

4

3

2

1